


Targeted ►
technology
and know-how

The new
butterfly valves
type 567 and 568

➤ A winner in every detail

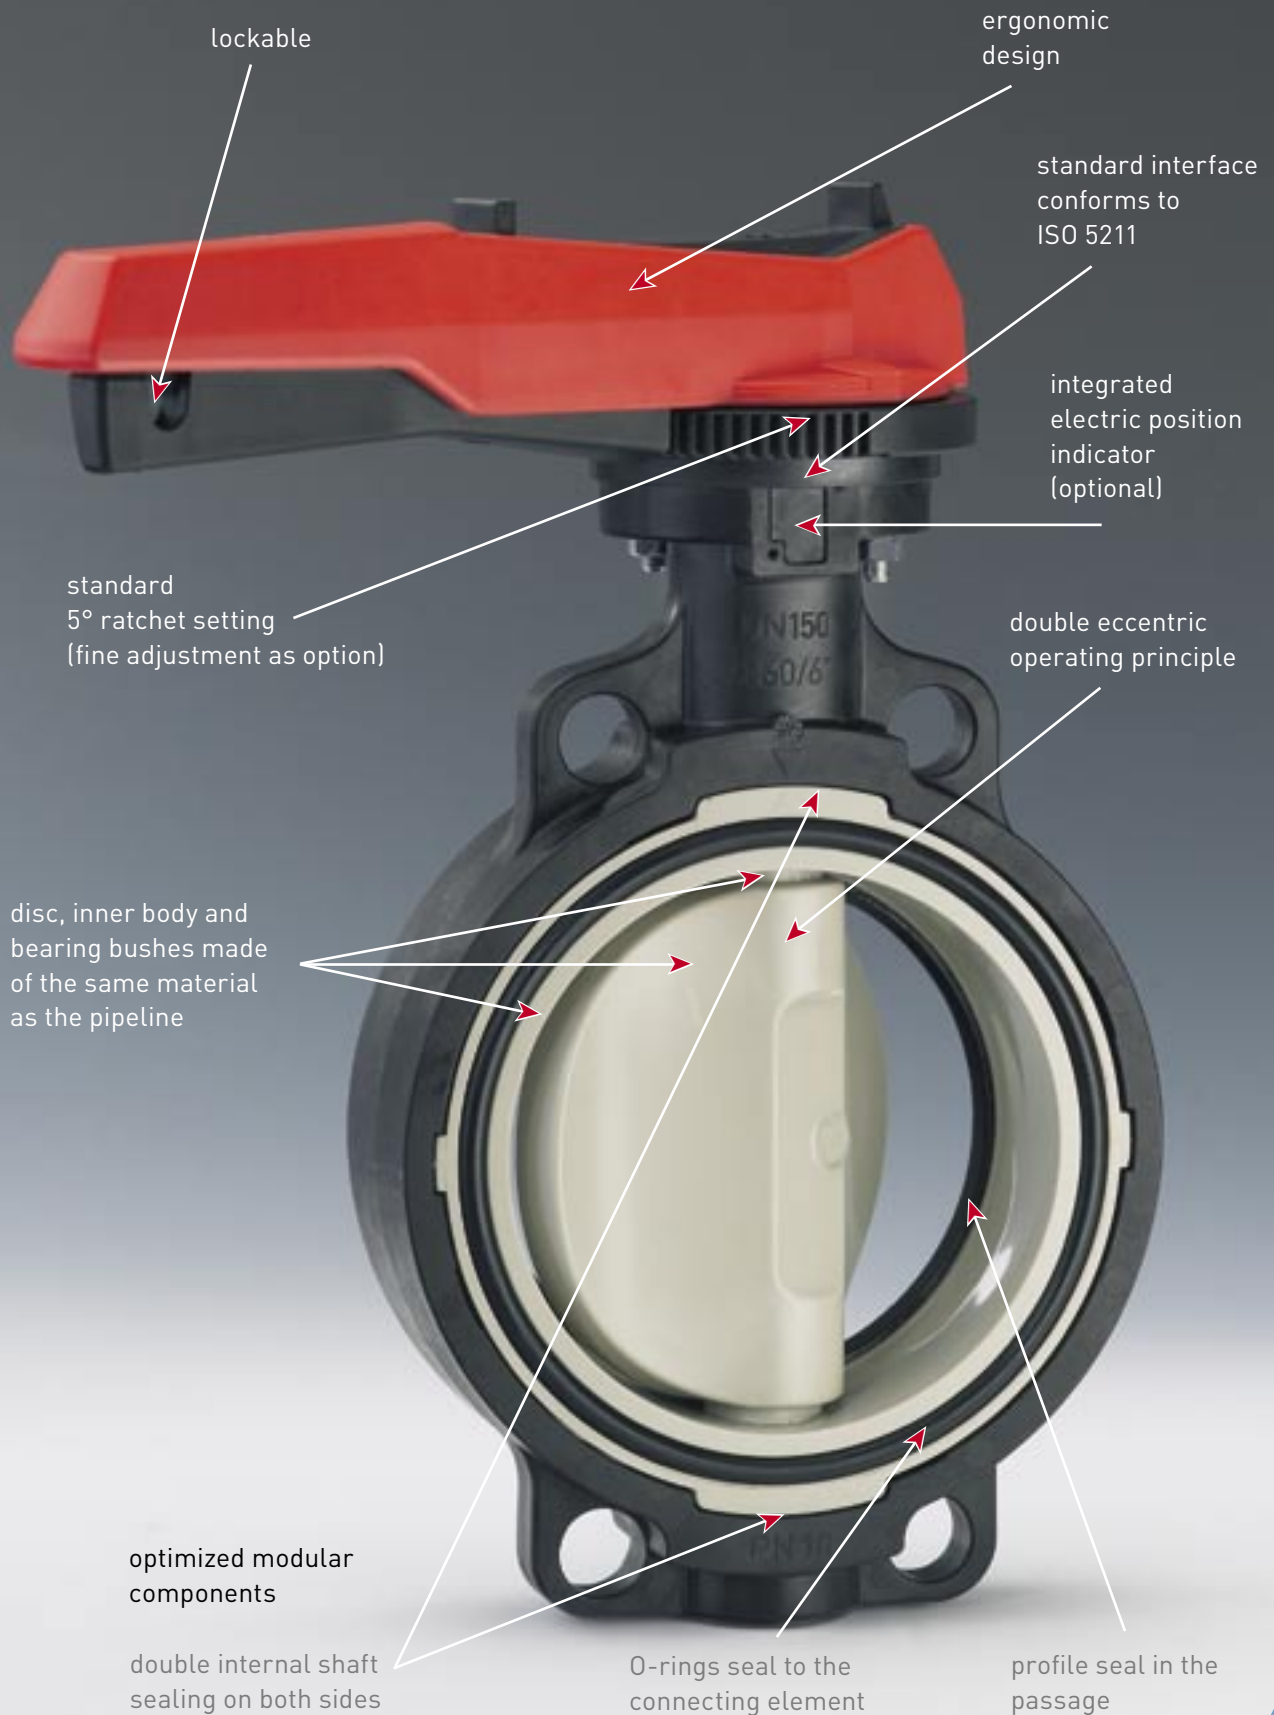

One system - many options

Georg Fischer presents the new 567/568 type series of butterfly valves with a comprehensive range of products and a multitude of interesting combination possibilities. We can offer you, for example, manual valves with hand lever or reduction gear. The program also includes pneumatically or electrically actuated valves from DN50 to DN200.

Our system's modular design principle allows you to exchange individual system components – fast, easily and at very little expense. You also have a choice of materials: PVC-U, PVC-C, ABS, or β -PP-H and PVDF. Our standard sealing materials are EPDM and FPM, but other materials are available on request.

All the customary installation pipe standards are supplied:

- metric: DIN, EN, ISO
- inch: BS, ASTM
- JIS (only wafer-type valves)

With this wide range of products to choose from you can always be sure of having the best possible solution for your application.

The new butterfly valves type 567/568 from Georg Fischer Piping Systems conform to the following international standards:

prEN ISO 16136
Industrial valves – butterfly valves in thermoplastic materials

ISO 9393
Thermoplastic valves – pressure test methods and requirements

EN 558
Face-to-face length of butterfly valves corresponds to EN 558

Approvals pending:
DIBt, NSF61, TA Luft



Standard
Lug-type butterfly valve/
end installation
Type 568

Standard
Wafer-type butterfly
valve
Type 567

Butterfly valve
with fine adjustment

Butterfly valve
with reduction gear

Butterfly valve
with pneumatic actuator
– single acting

Butterfly valve
with pneumatic actuator
– double acting; optional
manual override


Butterfly valve with
electric actuator;
optional manual
override and electric
position indicator

The new butterfly valves type 567/568 from

The name Georg Fischer stands for reliability and longevity and has done so for over 200 years. Our products guarantee quality, innovation and functionality. These qualities have also been incorporated in the design of our new butterfly valves type 567/568. You will find innovative ideas in every detail and all designed to meet your specific needs and requirements – from a safety, technical and business point of view.

Double eccentric operating principle

Making a statement is important. Especially when you do it with innovative details – like our new type 567/568 butterfly valves. Double eccentricity is the answer.

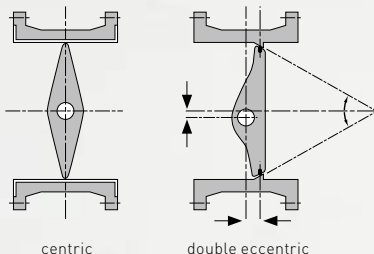

Most butterfly valves are built according to a centric operating principle, ours have a double eccentric design. This means the disc doesn't touch the seal in the open position, thus ensuring good frictional behavior and less wear and tear. In addition, the double eccentric design protects our butterfly valves even better against pressure surges. So they have a longer service life and require less maintenance.

Integrated electric position indicator

Now, you have a clear overview of your system at all times. Thanks to our integrated electric position indicator, you always know which valves are open and which are closed and this contributes greatly to your and your operators' safety. The electric position indicator integrated in the mounting flange is a totally new feature for butterfly valves. Our feedback concept includes a choice of five different types of limit switches perfectly suited to your needs.

Lower actuation torque

Our new butterfly valves have an actuation torque which is up to 50% lower than that of our previous model or that of our competitors. They are therefore easier to operate and you can use smaller, more economical actuators. Since the actuation torque largely depends on the internal pressure – usually between 3 and 6 bar – our new butterfly valves are ideal for precisely this pressure range. The maximum allowable nominal pressure at 20°C is 10 bar.

Optimized modular components

We practice quality. That's why we look at each sealing function separately, optimizing each seal according to its particular function.



from GF Piping Systems



The new butterfly valves in the dimensions DN 50 to DN 200 have a modular design, offering you a wide range of products to choose from. Our attention to detail sets new standards in regard to economic efficiency, safety and long service life.

We have used three separate sealing elements here:

- ▶ exterior seal: double, internal shaft seal on both sides of disc to protect against external leakage
- ▶ connecting element seal: standard O-rings
- ▶ disc seal: specially engineered profile seal

Reduced permeation

All the butterfly valve components that come into contact with the medium, such as disc, inner bodies and bearing bushes, are manufactured of the corresponding pipe material. Your benefit: excellent corrosion and chemical resistance.

New design of functional hand lever

The type 567/568 butterfly valves have been designed taking every detail into consideration, even the hand lever. The following features guarantee even more safety:

- ▶ On standard versions, the indexing is in increments of 5 degrees. There are always six teeth engaged between the ratchet and the index plate. This ensures accurate and safe positioning of the lever.
- ▶ With the fine adjustment option, the disc can be opened at any angle between 0° and 90°.
- ▶ The opening angle is clearly indicated in degrees on the index plate.
- ▶ The hand lever is lockable to prevent it from being moved.
- ▶ The hand lever is made of high strength PPGF (polypropylene, fiberglass reinforced).



The profile seal has been specially engineered for the double eccentric operating principle.

The use of standard O-rings for sealing the pipeline makes installation easy. No displacement, falling out or folding over – as is often the case with other sealing systems.



By integrating the position indicator in the mounting flange, the valve design was kept small and compact.

The ergonomic and practical design, compactness, and robust material of the hand lever makes it very operator friendly.



The proven concept of double, bi-directional sealing against leakage has been implemented which provides maximum reliability and safety. Due to the use of O-rings in standard dimensions, an economical solution with high-quality elastomers has been realized.