



# Hygard® BR1000 sheet

## Ballistic glazing - Level 2

Hygard® BR1000 ballistic grade sheet is a 1.000", 4-ply polycarbonate laminate that meets the UL 752 Level 2 rating for .357 Magnum ballistic attack and HP White TP 0500 Level IV. Unlike glass-clad products, this all-polycarbonate laminate resists spalling and white-out after repeated high force and ballistic impacts, an advantage in maintaining visibility of a threat during an attack. All Hygard® products incorporate Makrolon® polycarbonate sheet produced for high optical quality in security glazing laminates. Exterior surfaces have a proprietary Makrolon® AR hardcoat that facilitates cleaning and resists marring, chemical attack, and graffiti. Hygard® BR1000 sheet has a seven (7) year Limited Product Warranty against coating failure, yellowing, and hazing. The terms of the warranty are available upon request.

## Applications

Government and detention facilities, banks, specialty retailers, 24 hour convenience stores, cash transaction windows

## Typical Properties\*

Property	Values
Gauge / Tolerance	1.05 in ± 5%
Weight	6.5 lbs / sq ft
Shading Coefficient	0.85
U-Value	0.60
Light Transmission	72%

\*Typical properties are not intended for specification purposes

## Product Performance Ratings

### BALLISTIC

UL 752 Level 2 (.357 Magnum jacketed lead soft point)

### FORCED ENTRY & CONTAINMENT

ASTM F 1233.08 Class 5 Body Passage

ASTM F 1233.08 Class 2.4 Contraband Passage

ASTM F 1915.03 Grade 1

H.P. White TP 0500.03 Level IV Sequence 43

### AGENCY INFORMATION

Combustibility Class CC1

Florida Building Code 2017, 6th Ed.

[Miami-Dade NOA: NOA](#)


UL File: BP6864

## Hygard® BR1000 Sheet Construction

1/8" Makrolon® AR-1 Sheet

3/8" Makrolon® Sheet

Interlayer Bond

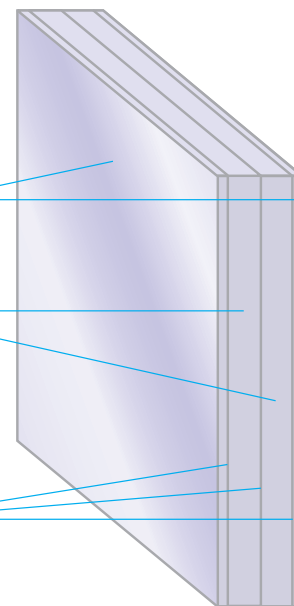

# Hygard® BR1000 sheet

## Glazing recommendations

- Structural security framing systems with equal or greater forced entry and/or ballistics ratings as the selected Hygard® laminate are recommended
- Hygard® laminate should be cut to allow for a minimum of one (1) inch edge engagement in the frame, with sufficient rabbet depth for material expansion (approx. 1/16"/ft.)
- Use wet or dry sealants/gaskets that are compatible with polycarbonate
- Remove protective masking after glazing operations are completed and before prolonged exposure to direct sunlight, moisture, or high temperature

## Standard sheet size

48" x 60", 48" x 72", 38" x 78", 38" x 96", 48" x 96",  
60" x 72", 60" x 96"

## Product specification

Hygard® BR1000 polycarbonate laminate:

- Four-ply, clear Makrolon® polycarbonate sheet constructed as follows:
  - 1/8" Makrolon® AR-1 abrasion resistant surface
  - Polyurethane bonding interlayer
  - 3/8" Makrolon® polycarbonate sheet
  - Polyurethane bonding interlayer
  - 3/8" Makrolon® polycarbonate sheet
  - Polyurethane bonding interlayer

